

2 Universal Inputs, Dual Universal Valve Controller

2 Universal Inputs

2-3A Outputs

CANopen®

P/N: AX023301

Features

- 2 universal signal inputs configurable as:
 - Voltage
 - Current
 - Resistive
 - PWM Duty Cycle
 - Frequency/RPM
 - Encoder
 - or Digital
- 2 proportional/digital outputs (up to 3A) and configurable as High-side or Low-side sourcing or Half-bridge
- Outputs are software configurable as:
 - Proportional Current
 - Proportional Voltage
 - Proportional PWM (*selectable frequency from 1Hz to 25kHz*)
 - Hotshot Digital
 - or On/Off Digital
- 1 +5V Reference, 100 mA
- LED Indicators of Power, Input and Output Status
- Fully protected outputs
- 12V or 24Vdc nominal
- Operational from -40 to 85°C temperature
- Software filtering for input types
- Multiple logic function blocks provided to allow for a wide variety of applications
- Configurable software output shutdowns provided on Power Supply faults
- Flexible customization for application-specific control logic
- 1 CANopen® port
- 250kpbs, 500kpbs and 1Mbps SAE J1939 models available
- Rugged IP67 packaging and connectors
- CE marking



Applications

The controller is designed to meet the rugged demands of mobile equipment, marine and heavy duty industrial machine applications. These applications include, but are not limited to:

- **Proportional Fan Drive Control**, PID Closed Loop Valve Control, Hydraulic Valve Control
- Signal Conversion

Ordering Part Numbers:

Actuator Controller, CANopen® P/N: **AX023301**

EDS File


Accessories:

PL-DTM06-12SA Mating Plug Kit

Description:

The Dual Input, Dual Output Valve Controller (2i2o) is designed for extremely versatile control of up to two proportional outputs to directly drive coils or other loads. Its flexible circuit design gives the user a wide range of configurable input or output types. The sophisticated control algorithms allow the user to program the controller for a wide range of applications without the need for custom software. The controller has two fully configurable universal inputs that can be setup to read: voltage, current, resistive, frequency, or digital input signals. There are also two universal outputs that can be setup to drive: proportional current (up to 3A each); hotshot digital current; proportional voltage (up to supply); proportional PWM; or straight on/off digital loads. They are also configurable as high-side, low-side or half-bridge outputs. All I/O ports on the unit are independent from one another. The 2i2o is a highly programmable controller, allowing the user to configure it for their application. Its sophisticated control algorithms allow for open or closed loop drive of the proportional outputs. It can be operated as either a self-contained control system, driving the outputs directly from the on-board inputs, and/or it can be integrated into a CANopen® network of controllers. All I/O and logical function blocks on the unit are inherently independent from one another, but can be programmed to interact in a large number of ways. The Block Diagram shows the hardware features. The 2i2o has several built-in protection features that can shut off the outputs in adverse conditions. They include hardware shutoffs to protect the circuits from being damaged as well as software shutdown features that can be enabled in safety critical systems. LED indicators provide power and input/output status information for the user. All setpoints are user configurable.

Block Diagram

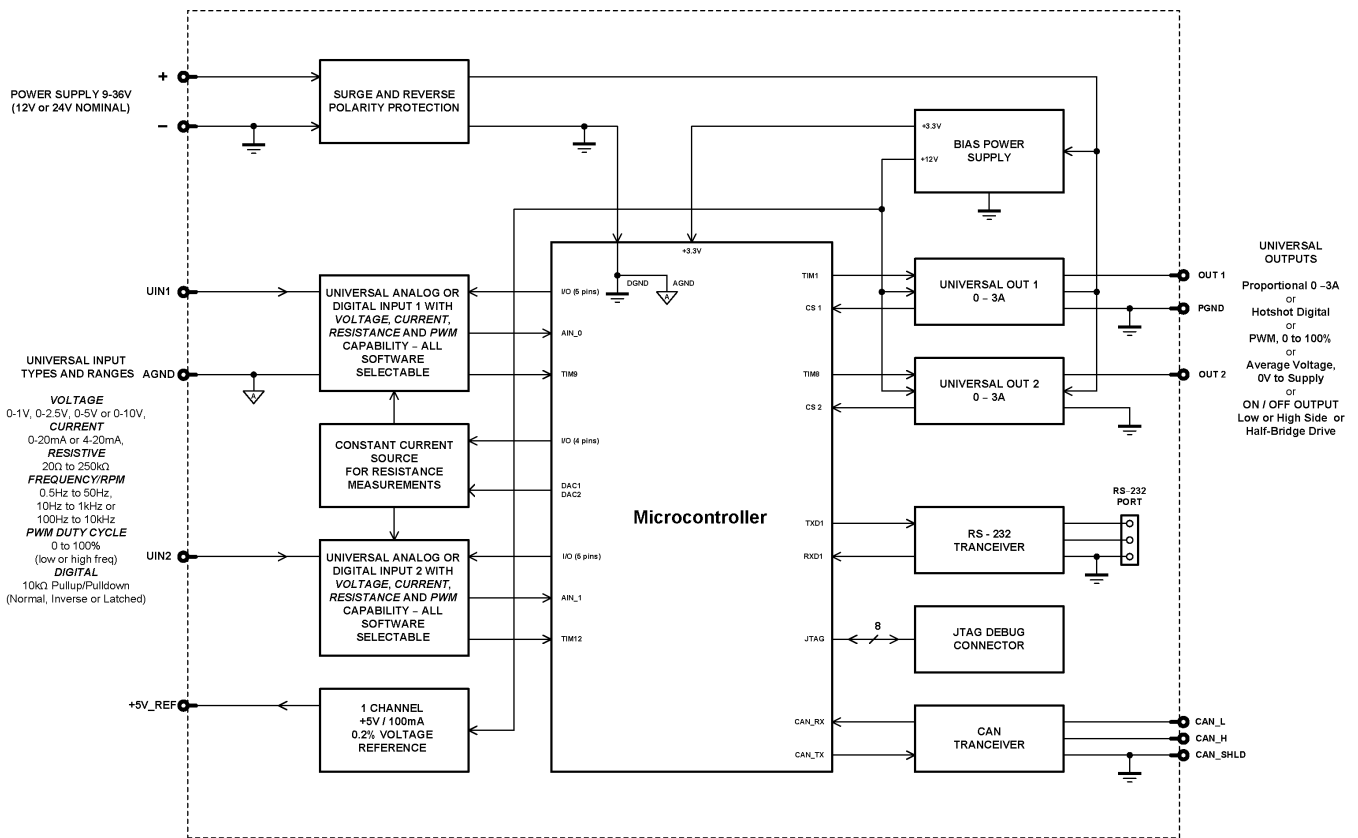

Technical Specifications:

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on <https://www.axiomatic.com/service/>.

Inputs

Power Supply Input - Nominal	12 or 24VDC nominal (8...36 VDC power supply range)
Protection	Reverse polarity protection is provided. Surge protection up to 40V is provided. Overvoltage shutdown of the output load is provided. Undervoltage protection (hardware and software shutdown at 6V) is provided.
CAN	SAE J1939 Commands 500 kbps and 1 Mbps baud rate models are available. See Ordering part numbers.
Voltage Reference	One provided 5V +/- 0.2% error Can source up to 100mA without derating
Analog GND Reference	One provided
Universal Signal Inputs	2 fully independent universal inputs are provided. Refer to Table 1.0 All inputs are user selectable as Voltage, Current, Resistive, Frequency, RPM, PWM, or Digital input types. Inputs are sampled multiple times per millisecond. Protected against shorts to GND or +Vps (up to 40 Vdc) All input channels can handle negative voltage inputs down to -2VDC due to voltage spikes or noise. Response time to change at the input TBA mSec +/- 1 mSec (without software filtering) unless otherwise noted.

Table 1.0 – Input – User Selectable Options	
Analog Input Functions	Voltage Input, Current Input or Resistive Input 12-bit Analog to Digital
Voltage Input	0-2.5V (Impedance 1 M Ω) 0-5V (Impedance 204 k Ω) 0-10V (Impedance 135 k Ω) 1mV resolution, accuracy +/- 1% error
Current Input	0-20 mA (Current Sense Resistor 124 Ω) 4-20 mA (Current Sense Resistor 124 Ω) 1uA resolution, accuracy +/- 1% error
Resistive Input	Self-calibrating for range of 20 Ω to 250 k Ω 1 Ω resolution, accuracy +/- 1% error Slower response time is due to the auto-calibration feature. It could take up to ~2 Sec. for the input reading to stabilize after a large change (i.e. 50 Ω to 200k Ω) at the input, or to detect an open circuit. <i>It is recommended to use software filtering type Moving Average with Filter Constant 100 for this input type.</i>
Digital Input Functions	Discrete Input, PWM Input, Frequency Input, RPM Input 15-bit timer (PWM, Frequency, RPM)
Digital Input Level	Up to +Vsupply
PWM Input	0 to 100% Low Frequency (<1kHz) or High Frequency (>100 Hz) 0.01% resolution, accuracy +/- 1% error 1M Ω Impedance, or 1k Ω Pullup/10k Ω Pulldown <i>Response time is dependent on input frequency.</i>
Frequency/RPM Input	0.5 to 50Hz Range: 0.01Hz resolution 10Hz to 1kHz Range: 0.1Hz resolution 100 Hz to 20kHz Range: 1Hz resolution Resolution: 0.01% Accuracy: +/- 1% error 1 M Ω Impedance, or configurable 10 k Ω Pullup/Pulldown Input debouncing selectable <i>Response time is dependent on input frequency.</i>
Digital Input	Normal, Inverse or Latched (pushbutton) Configurable 10k Ω pullup or 10k Ω pulldown resistor (to GND) resistor which can also be disabled (floating input) Rising/Falling edge threshold 2.0V +/- 0.1V Amplitude: Up to +Vsupply Input debouncing time selectable



Outputs

Universal Outputs	<p>Two independent software controlled outputs selectable as: Proportional Current; Hotshot Digital; PWM Duty Cycle; Proportional Voltage; or On/Off Digital types</p> <p>Universal Outputs up to 3A and user selectable modes as: High-side Sourcing Low-side Sinking Half-bridge Sourcing Current sensing Grounded load for High-side and Half-bridge modes. The load is connected to +Vsupply in low-side mode.</p> <p>All output types have configurable minimum and maximum output levels within the range for the type selected.</p> <p>Current Outputs: 1mA resolution, accuracy +/- 1% error Software controlled PID current Range 0 to 3000 mA Fully configurable dither superimposed on top of output current Configurable from 50 to 400Hz amplitude High frequency output drive at 25kHz</p> <p>Voltage Outputs: 0.1V resolution, accuracy +/- 5% error Average voltage output based on unit power supply High frequency drive at 25kHz Additional external filtering is required to create a DC voltage</p> <p>PWM Outputs: 0.1% resolution, accuracy +/- 0.1% error Range 0 to 100% Output Frequency: 1 Hz to 25 kHz Configurable frequency ONLY if no current output types are used, otherwise default 25kHz is used</p> <p>Digital On/Off: Sourcing from power supply, sinking from output to ground or OFF. Load at supply voltage must not draw more than 4A.</p>
Protection	<p>Fully overcurrent protected against short circuit to ground or +Vps Grounded short circuit protection will engage at 4.5A +/- 0.5A. Unit will fail safe in the case of a short-circuit condition, and is self-recovering when the short is removed.</p>
Power GND Reference	One Provided

General Specifications

Quiescent Current	80 mA @ 12Vdc; 50 mA @ 24Vdc typical
Microprocessor	STM32F205VG
EMC Compliance	CE marking
Vibration	<p>Random Vibration: 7.7 Grms peak Sinusoidal Component: 10 g peak Based on MIL-STD-202G, Methods 204G and 214A</p>
Diagnostics	Each input and output channel can be configured to send diagnostic messages to the J1939 CAN network if the I/O goes out of range. Diagnostic data is stored in a non-volatile log. Refer to the User Manual for details.
Additional Fault Feedback	There are several types of faults that the controller will detect and provide a response: unit power supply undervoltage and overvoltage, microprocessor over temperature and lost communication. They can be sent to the J1939 CAN bus.
Control Logic	User configurable functionality Refer to the User Manual for details.
Communications	Compliant to CANopen® Standards 1 CAN port (CANopen®)
LED Indicators	5 LEDs for Power, Input Levels and Output Levels
User Interface	EDS File Configurable via standard CANopen® tools (not supplied)
Reflashing Software over CAN	Reflash software over the CAN bus using the Axiomatic Electronic Assistant.

Dimensional Drawing

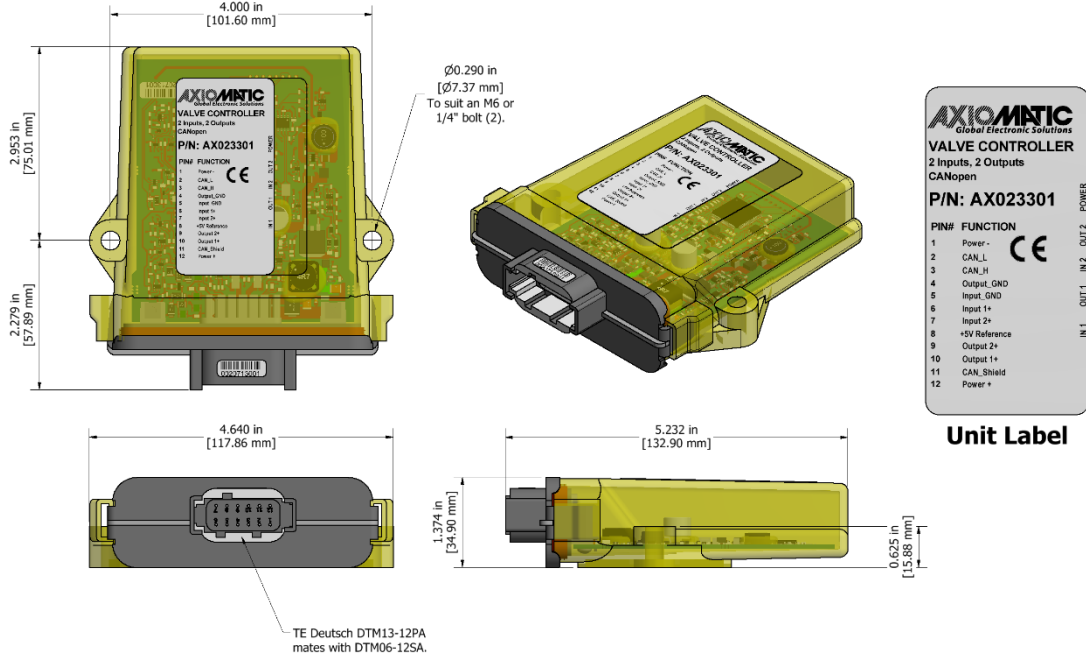

Unit Label

Enclosure	High Temperature Nylon Enclosure Clear PCB Enclosure - (equivalent TE Deutsch P/N: EEC-325X4B-E016) 4.64 x 5.232 x 1.374 inches 117.86 x 132.90 x 34.90 mm (W x L x H excluding mating plugs) Refer to the dimensional drawing.																												
Protection	IP67 rating for the product assembly																												
Weight	0.50 lb. (0.23 kg)																												
Temperature Rating	-40°C to +85°C (-40°F to 185°F)																												
Electrical Connections	12 pin connector (equivalent TE Deutsch P/N: DTM13-12PA-R008) 20 AWG wire is recommended for use with contacts 0462-201-20141. <table border="1" data-bbox="662 1136 1344 1514"> <thead> <tr> <th colspan="2">CAN and I/O Connector</th> </tr> <tr> <th>Pin #</th> <th>Description (Notes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>BATT -</td> </tr> <tr> <td>2</td> <td>CAN_L</td> </tr> <tr> <td>3</td> <td>CAN_H</td> </tr> <tr> <td>4</td> <td>P_GND (Out 1 and Out 2)</td> </tr> <tr> <td>5</td> <td>Analog_GND (Input 1 and Input 2)</td> </tr> <tr> <td>6</td> <td>Input 1+</td> </tr> <tr> <td>7</td> <td>Input 2+</td> </tr> <tr> <td>8</td> <td>+5V Ref</td> </tr> <tr> <td>9</td> <td>Output 2+</td> </tr> <tr> <td>10</td> <td>Output 1+</td> </tr> <tr> <td>11</td> <td>CAN_Shield</td> </tr> <tr> <td>12</td> <td>BATT +</td> </tr> </tbody> </table>	CAN and I/O Connector		Pin #	Description (Notes)	1	BATT -	2	CAN_L	3	CAN_H	4	P_GND (Out 1 and Out 2)	5	Analog_GND (Input 1 and Input 2)	6	Input 1+	7	Input 2+	8	+5V Ref	9	Output 2+	10	Output 1+	11	CAN_Shield	12	BATT +
CAN and I/O Connector																													
Pin #	Description (Notes)																												
1	BATT -																												
2	CAN_L																												
3	CAN_H																												
4	P_GND (Out 1 and Out 2)																												
5	Analog_GND (Input 1 and Input 2)																												
6	Input 1+																												
7	Input 2+																												
8	+5V Ref																												
9	Output 2+																												
10	Output 1+																												
11	CAN_Shield																												
12	BATT +																												
Mating Plug Kit	Axiomatic P/N: PL-DTM06-12SA . It is comprised of the following TE Deutsch part equivalents: plug (DTM06-12SA); wedgelock (WM12S); and 12 contacts (0462-201-20141) as well as 6 sealing plugs (0413-204-2005).																												

Installation	Mounting holes sized for ¼ inch or M6 bolts. The bolt length will be determined by the end-user's mounting plate thickness. The mounting flange of the controller is 0.63 inches (16 mm) thick. All field wiring should be suitable for the operating temperature range, rated voltage and current. Wiring to the product must be in accordance with all applicable local codes. Install the unit with appropriate space available for servicing and for adequate wire harness access (6 inches or 15 cm) and strain relief (12 inches or 30 cm).
Network Termination	It is necessary to terminate the network with external termination resistors. The resistors are 120 Ohm, 0.25W minimum, metal film or similar type. They should be placed between CAN_H and CAN_L terminals at both ends of the network.

Note: CANopen® is a registered community trademark of CAN in Automation e.V.

Form: TDAX023301-06/19/23