



REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
P1-D1	INITIAL RELEASE	2020-11-27	GDV

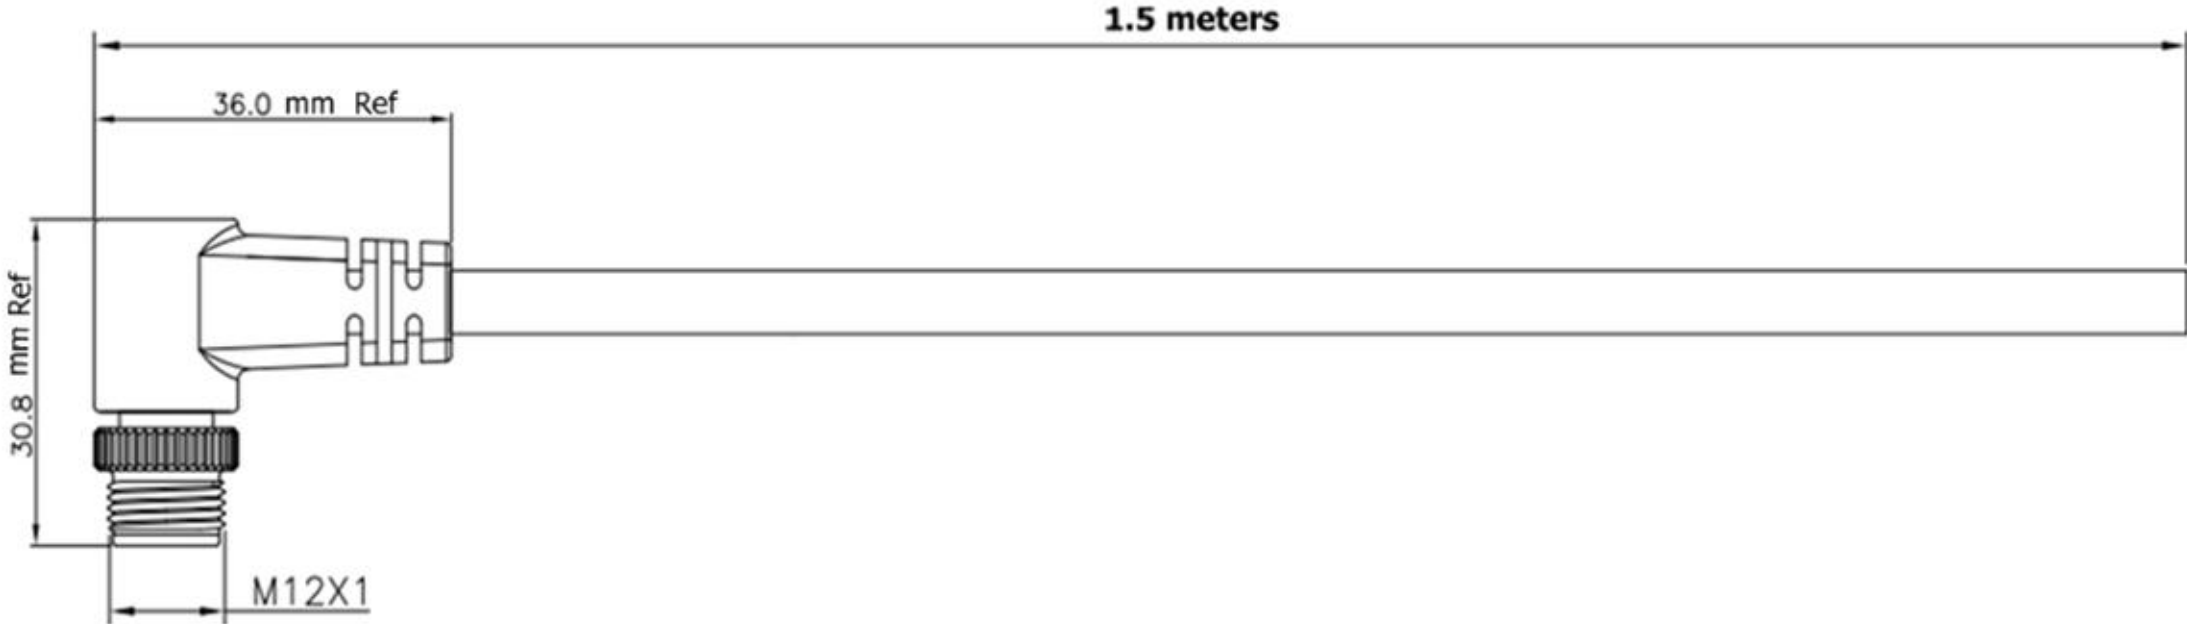

Specifications:  
 Standard: IEC 61076-2-101  
 Current rating: 4A(3,4,5PIN); 2A(8PIN); 1.5A(12PIN)  
 Voltage rating: 250V(3,4,PIN); 60V(5PIN); 30V(8,12PIN)  
 Contact Resistance: 5ohm Max.  
 Insulation Resistance: 10M ohm Min., DC 450V  
 Operating Temperature: -40°C~80°C  
 IP Rating: IP67 in Locked Condition

M12 12 PIN MALE CABLE		
PIN	FUNCTION	WIRE COLOR
1	RS422_RX+	BLACK
2	RS422_TX+	BROWN
3	RS422_RX-	RED
4	RS232_TX2	ORANGE
5	RS232_RX2	YELLOW
6	CAN_L	DARK GREEN
7	CAN_H	BLUE
8	RS232_TX1	PURPLE
9	RS232_RX1	GREY
10	RS422_TX-	WHITE
11	GND	PINK
12	GND	LIGHT GREEN

<small>PROPRIETARY</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND REMAINS THE EXCLUSIVE PROPERTY OF AXIOMATIC TECHNOLOGIES CORPORATION. THIS DRAWING MAY NOT BE USED, REPRODUCED IN WHOLE OR IN PART, NOR REVEALED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF AXIOMATIC TECHNOLOGIES CORPORATION. BY ACCEPTANCE OF THIS DRAWING, THE BEARER AGREES TO THESE CONDITIONS.</small>				 <small>AXIOMATIC TECHNOLOGIES CORPORATION 5915 WALLACE ST. MISSISSAUGA, ON CANADA L4Z1Z8 905-602-9270</small>			
MATERIAL NA	DRAWN EL	DATE 2020-11-27	TITLE M12 A-Coded, 12 Position Male Cable - 1.5 m (4.92') Flying Leads				
FINISH NA	CHECKED	DATE	DWG REV D1	DWG NO AX070533-MD	PART REV P1		
THIRD ANGLE PROJECTION	TOOL INVENTOR SIZE B	APPROVED	DATE	SCALE Full	PART NO AX070533		
				SHEET 1 of 1			