

Ø6.85 mm
[0.270 in]
to suit an M6
or 1/4" bolt (4)

133.00 mm
[5.236 in]

121.00 mm
[4.764 in]

148.00 mm
[5.827 in]

5.00 mm
[0.197 in]

189.13 mm
[7.446 in]

63.25 mm
[2.490 in]


194.00 mm
[7.638 in]

(206.82 mm)
[8.142 in]

15.54 mm
[0.612 in]



unit label

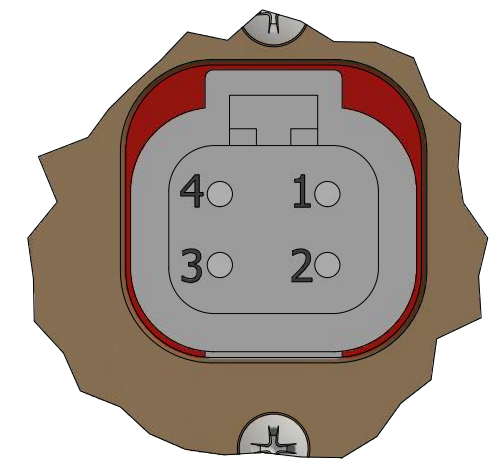

DETAIL A
connector pinout

TOLERANCES fabrication +/- 0.015 X.XXX +/- 0.031 X.XX +/- 0.031 X.X +/- 0.031 fractional +/- 0.031 machining +/- 0.005 X.XXX +/- 0.010 X.XX +/- 0.015 X.X +/- 0.015 fractional +/- 0.031		MATERIAL die cast aluminum chassis FINISH hard anodized	DRAWN TF CHECKED DATE APPROVED DATE	DATE 2022-02-07	TITLE 24-12-25A isolated DC converter DWG REV D1 SCALE full	DWG NO AX081510-MD-A PART NO AX081510	PART REV A SHEET 1 of 1
---	--	---	--	--------------------	--	--	----------------------------------

PROPRIETARY
 THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND REMAINS THE EXCLUSIVE PROPERTY OF AXIOMATIC TECHNOLOGIES CORPORATION. THIS DRAWING MAY NOT BE USED, REPRODUCED IN WHOLE OR IN PART, NOR REVEALED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF AXIOMATIC TECHNOLOGIES CORPORATION. BY ACCEPTANCE OF THIS DRAWING, THE BEARER AGREES TO THESE CONDITIONS.

AXIOMATIC TECHNOLOGIES CORPORATION
 5915 WALLACE ST.
 MISSISSAUGA, ON
 CANADA L4Z1Z8
 905-602-9270