
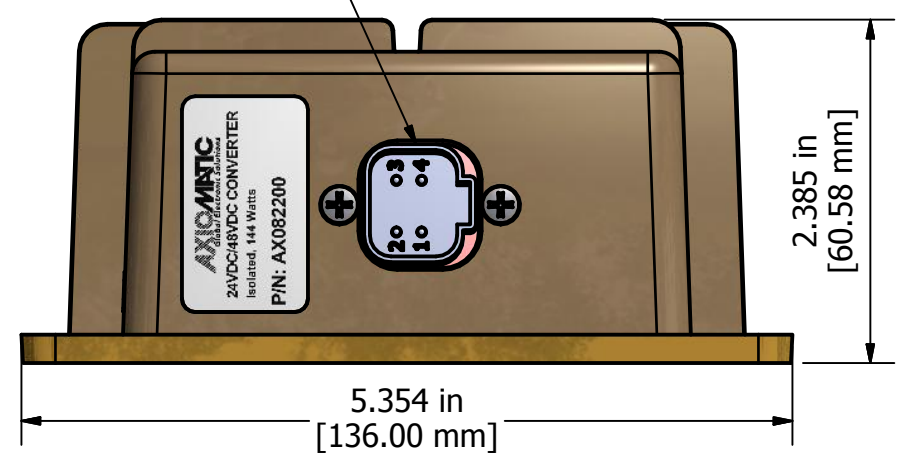


**DETAIL A**  
 mounting slot (4)  
 to suit an M6 or 1/4 bolt

TE Deutsch DT15-4P  
 mates with DT06-4S

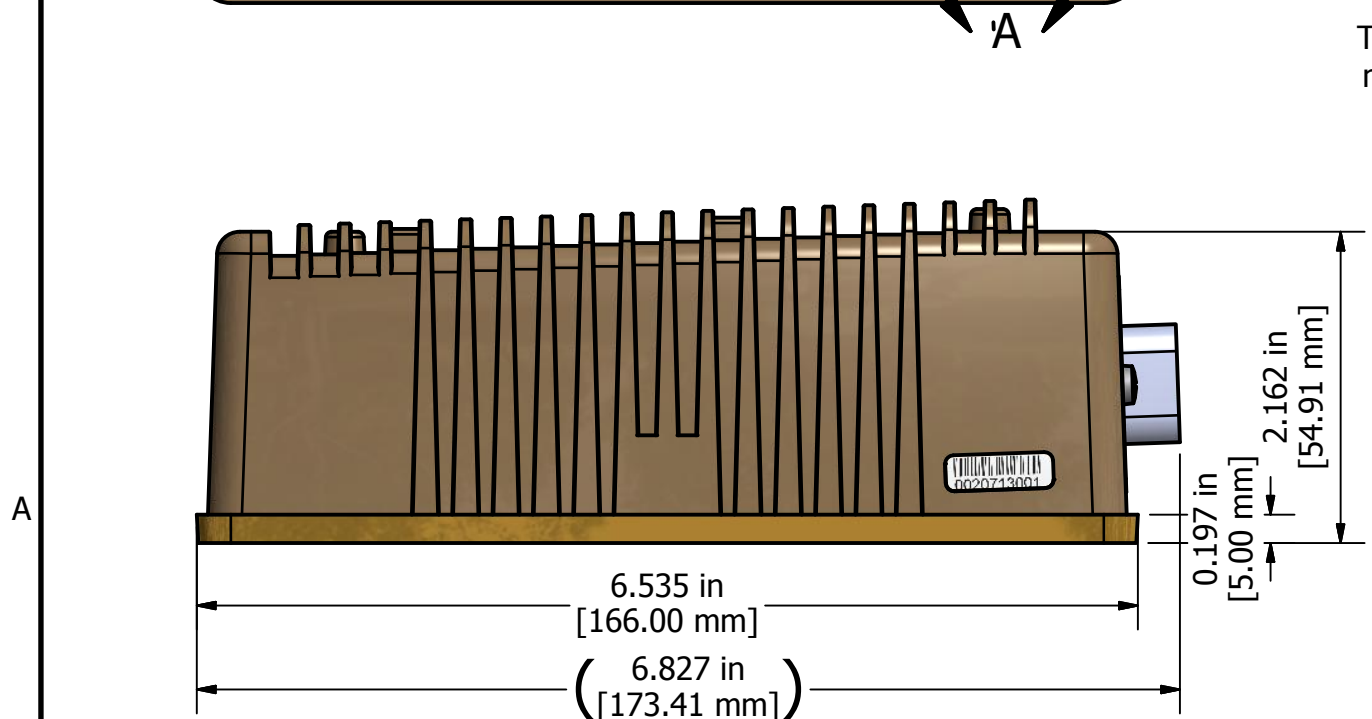

**unit label**

TOLERANCES			
fabrication	machining		
X.XXX +/- 0.015	X.XXX +/- 0.005		
X.XX +/- 0.031	X.XX +/- 0.010		
X.X +/- 0.031	X.X +/- 0.015		
fractional +/- 0.031	fractional +/- 0.031		

<small>PROPRIETARY</small> THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND REMAINS THE EXCLUSIVE PROPERTY OF AXIOMATIC TECHNOLOGIES CORPORATION. THIS DRAWING MAY NOT BE USED, REPRODUCED IN WHOLE OR IN PART, NOR REVEALED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF AXIOMATIC TECHNOLOGIES CORPORATION. BY ACCEPTANCE OF THIS DRAWING, THE BEARER AGREES TO THESE CONDITIONS.		<small>AXIOMATIC TECHNOLOGIES CORPORATION</small> <b>AXIOMATIC</b> Global Electronic Solutions 5915 WALLACE ST. MISSISSAUGA, ON CANADA L4Z1Z8 905-602-9270	
MATERIAL	DRAWN	DATE	TITLE
ADC12 die cast aluminum	TF	8/8/2017	Isolated 24-48V 144W DC Converter
FINISH	CHECKED	DATE	DWG REV
MIL-A-8625 type III class I hard anodized			D1
	APPROVED	DATE	DWG NO
			AX082200-MD
			PART REV
			1
			SCALE
			full
			PART NO
			AX082200
			SHEET
			1 of 1