


DETAIL A
molded in TE Deutsch receptacle DTM04-12PA,
mates with DTM06-12SA

connector pin assignment

PIN	FUNCTION	PIN	FUNCTION
1	NC	7	BATT +
2	-	8	BATT -
3	OUTGND 1	9	AD OUT 2
4	OUTGND 2	10	AD OUT 1
5	CAN_H	11	C
6	CAN_L	12	NO

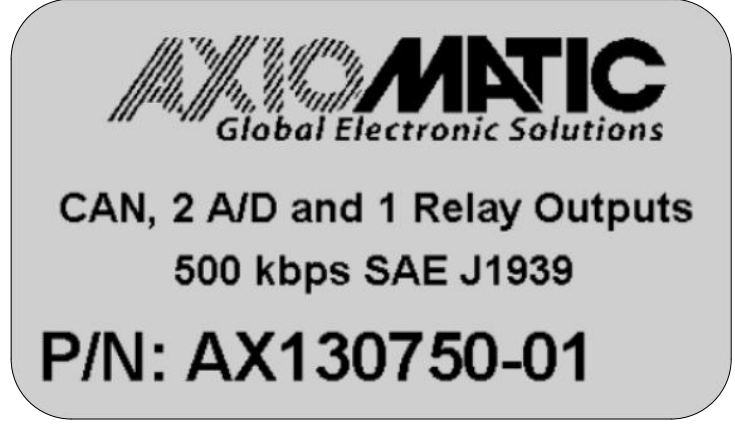

label detail

TOLERANCES

fabrication		machining	
X.XXX	+/- 0.015	X.XXX	+/- 0.001
X.XX	+/- 0.031	X.XX	+/- 0.005
X.X	+/- 0.031	X.X	+/- 0.015
fractional	+/- 0.031	fractional	+/- 0.031

MATERIAL		DRAWN	DATE	TITLE		
injection molded glass filled PA66 ultrasonically welded		TF	2019-11-29	Dual Analog, Single Relay Output, J1939, 500 kbps		
		CHECKED	DATE	DWG REV	DWG NO	PART REV
		DL		D1	AX130750-01-MD	3
		APPROVED	DATE	SCALE	PART NO	SHEET
		DL		full	AX130750-01	1 of 1

AXIOMATIC TECHNOLOGIES CORPORATION
5915 WALLACE ST.
MISSISSAUGA, ON
CANADA L4Z1Z8
905-602-9270