

CAN to 2 Analog/Digital Isolated Signals and 1 Relay Output Converter
Isolated CANopen®
P/N: AX130771

Features:

- 2 Analog/Digital isolated signal outputs configurable as: 0-5V; 0-10V; 4-20 mA; Frequency or PWM Signal.
- 1 Relay output
- 1 isolated CAN port (CANopen®)
- Operational 9...36 Vdc (12 Vdc or 24 Vdc)
- Integrated 12-pin, TE Deutsch equivalent connector.
- Fully sealed TE Deutsch equivalent enclosure, IP67
- Meets the surge requirements of SAE J1445
- Designed for EMC compliance
- EDS File



Applications:

- Throttle controls for marine engine applications
- Servo applications

Ordering Part Numbers:


CAN to A/D and Relay Outputs Converter, Isolated CANopen® - P/N: **AX130771**

EDS File

Accessories:

Mating Plug KIT: **PL-DTM06-12SA**

BLOCK DIAGRAM

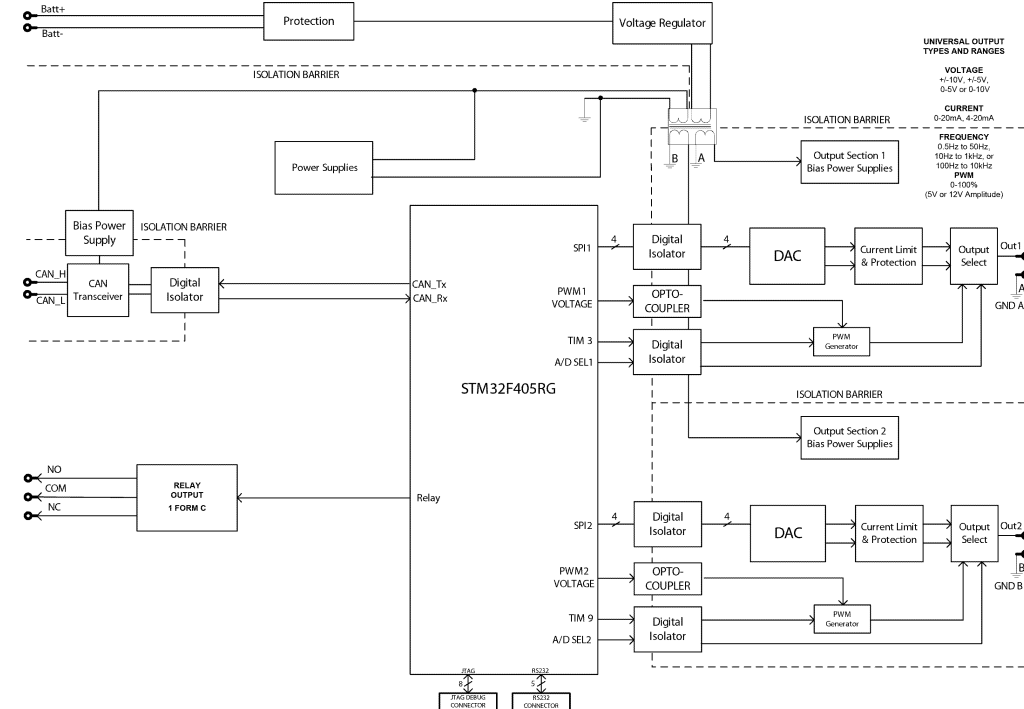

Technical Specifications:

Specifications are indicative and subject to change. Actual performance will vary depending on the application and operating conditions. Users should satisfy themselves that the product is suitable for use in the intended application. All our products carry a limited warranty against defects in material and workmanship. Please refer to our Warranty, Application Approvals/Limitations and Return Materials Process as described on <https://www.axiomatic.com/service/>.

Power

Power Supply Input - Nominal	12 V or 24 Vdc nominal; 9...36 Vdc The minimum allowable supply voltage for the power pin is 7 Vdc.
Surge Protection	Meets the surge requirements of SAE J1445
Reverse Polarity Protection	Provided
Under and Over Voltage Protections	Under-voltage shutdown at 8V. Over-voltage shutdown at 48V.

Outputs

Analog/Digital Output	<p>2 isolated signal outputs configurable as: 0-5V, 0-10V, 4-20 mA, PWM/Frequency or Digital</p> <p>Analog Voltage or Current Outputs: Voltage Output: 0-5 Vdc, 0-10 Vdc Maximum load is 30 mA. Current Output: 0-20 mA or 4-20 mA Maximum load resistance is < 500 Ohms. Compliance Voltage is 14V.</p> <p>Digital Types: PWM or Frequency Outputs 0.1 Hz to 20 kHz 0-100% D.C. 5 V or 12 V Amplitude Push pull output Maximum load is 50 mA. Over-current protection (50 mA)</p> <p>12-bit Protected against shorts to GND or +Vcc</p>
Output Accuracy	<p>Voltage: 0.2% Current: 0.2% PWM Signal: 0.1% Frequency Signal: 0.1% Digital: 1%</p>
Relay Output	<p>Sets 1 Form C relay output Resistive load:</p> <ul style="list-style-type: none"> • 5A (NO)/5 A (NC) at 30Vdc <p>Dielectric strength:</p> <ul style="list-style-type: none"> • 3,000 VAC, 50/60 Hz for 1 min between coil and contacts • 2,500 Vrms between open contacts <p>There is no special overcurrent/overvoltage protection on the relay outputs. The user is advised to provide a fast acting 6A fuse or an adequate external protection if necessary.</p>

Control Software

Software Platform	Pre-programmed with standard logic. Refer to the user manual.
-------------------	---

General Specifications

Microcontroller	STM32F405RGT7; 32-bit, 1024 Kbytes Flash Program Memory
CAN Port	1 Isolated CAN (CANopen®) SAE J1939 model is PN AX130770
Isolation	300 Vrms; 4 Way isolation (power-output1-output2-CAN)
Quiescent Current Draw	Typical 65mA @12Vdc; 35mA @ 24Vdc
Response Time	<10 mSec. Typical
Operating Temperature	-40°C to 85°C (-40°F to 185°F)
Storage Temperature	-50°C to 125°C (-58°F to 257°F)

Weight	0.50 lb. (0.227 kg)																												
Protection Rating	IP67																												
Vibration	MIL-STD-202G, Test 204D and 214A (Sine and Random) 10 g peak (Sine); 7.86 Grms peak (Random)																												
Shock	MIL-STD-202G, Test 213B, 50 g																												
Enclosure and Dimensions	High Temperature Nylon enclosure – TE Deutsch PCB Enclosure (EEC-325X4B) 4.677 x 5.236 x 1.417 inches 118.80 x 133.00 x 36.00 mm (W x L x H excluding mating plugs) Refer to Figure 1.0, dimensional drawing.																												
Electrical Connections	Integral 12 pin receptacle (Equivalent TE Deutsch P/N: DTM13-12PA-R008) <table border="1"> <thead> <tr> <th colspan="2">CAN and I/O Connector</th> </tr> <tr> <th>Pin #</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Relay Output (NC)</td> </tr> <tr> <td>2</td> <td>CAN_GND</td> </tr> <tr> <td>3</td> <td>Output 2 GND</td> </tr> <tr> <td>4</td> <td>Output 1 GND</td> </tr> <tr> <td>5</td> <td>CAN_H</td> </tr> <tr> <td>6</td> <td>CAN_L</td> </tr> <tr> <td>7</td> <td>BATT +</td> </tr> <tr> <td>8</td> <td>BATT-</td> </tr> <tr> <td>9</td> <td>A/D Output 1</td> </tr> <tr> <td>10</td> <td>A/D Output 2</td> </tr> <tr> <td>11</td> <td>Relay Output (C)</td> </tr> <tr> <td>12</td> <td>Relay Output (NO)</td> </tr> </tbody> </table>	CAN and I/O Connector		Pin #	Description	1	Relay Output (NC)	2	CAN_GND	3	Output 2 GND	4	Output 1 GND	5	CAN_H	6	CAN_L	7	BATT +	8	BATT-	9	A/D Output 1	10	A/D Output 2	11	Relay Output (C)	12	Relay Output (NO)
CAN and I/O Connector																													
Pin #	Description																												
1	Relay Output (NC)																												
2	CAN_GND																												
3	Output 2 GND																												
4	Output 1 GND																												
5	CAN_H																												
6	CAN_L																												
7	BATT +																												
8	BATT-																												
9	A/D Output 1																												
10	A/D Output 2																												
11	Relay Output (C)																												
12	Relay Output (NO)																												
Mating Plug Kit	Axiomatic PN: PL-DTM06-12SA It is comprised of the following, equivalent, TE Deutsch parts: DTM06-12SA; wedgelock WM12S; 12 contacts (0462-201-20141); and 6 sealing plugs (0413-204-2005).																												
User Interface	EDS File																												
Refleshing	Axiomatic Electronic Assistant KIT, P/N: AX070502 , AX070505K , or AX070506K																												



Figure 1.0 – Dimensional Drawing

CANopen® is a registered community trademark of CAN in Automation e.V.

Form: TDAX130771-05/31/23